

Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Reinforced geomembrane for hydraulics works – **RENOLIT ALKORPLAN Hydro R SST**

from

RENOLIT IBERICA, S.A.



Rely on it.

Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	S-P-07050
Publication date:	2023-04-25
Valid until:	2028-03-13

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



Programme information

Programme:	<p>The International EPD® System</p> <p>EPD International AB Box 210 60 SE-100 31 Stockholm Sweden</p> <p>www.environdec.com info@environdec.com</p>
-------------------	---

Product category rules (PCR): <i>PCR 2019:14 Construction Products, version 1.11</i>
PCR review was conducted by: <i>The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact.</i>
Independent third-party verification of the declaration and data, according to ISO 14025:2006: <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification
Third party verifier: TECNALIA R&I CERTIFICACION, S.L. info@tecnaliacertificacion.com <i>Accredited by: ENAC n°125/C-PR283 accreditation.</i>
Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable.

EPD of construction products may not be comparable if they do not comply with EN 15804.



Relu on it.

1. Company information

Owner of the EPD: **RENOLIT Ibérica, S.A.**
Ctra. Del Montnegre, s/n, 08470 Sant Celoni
T: +34 938 484 000; F: +34 938 674 334; @: renolit.iberica@renolit.com

Contact: Francisco José Moreno Marín
Francisco-Jose.Moreno@renolit.com

Description of the organisation: The **RENOLIT Group** is a leading global specialist for high-quality plastic films, sheets and other plastic products. With more than thirty production sites and sales units in over twenty countries, and with annual sales of around €1,2 billion, the company with headquarters in Worms – around 70 km south of Frankfurt am Main – is one of the world's leading plastic products manufacturers. About 5.000 employees continue to further develop the knowledge and expertise gained from over seventy-five years of business.

RENOLIT Ibérica is headquartered in Sant Celoni, north of Barcelona, manufacturing one million coils of membranes a year. The factory counts on more than 300 employees for the production of waterproofing membranes under the brand **RENOLIT ALKORPLAN**.

In the swimming pools industry, **RENOLIT** is the leading manufacturer of PVC sheets for swimming pool and the leading brand of waterproofing reinforced membrane for swimming pools.

In the roofing industry **RENOLIT** is a worldwide leader in the market of synthetic waterproofing membranes.

Our wide range of products and solutions meets the many demands and needs of architects, installers and facility managers.

In the civil engineering industry, **RENOLIT** has developed waterproofing solutions for all types of works, pioneering some applications that are mainstream today: hydraulic, such as basins, dams and attenuation tanks, as well as underground works, such as tunnels, shafts and foundations.

Product-related or management system-related certifications:

- Organisation certifications:

Factory certified in accordance with the requirements of ISO 9001 and ISO 14001 certificate. EMAS registration number: ES-CAT-000124.

Factory certified under the EuCertPlast Audit Scheme 4.2 in line with EN 15343:2007. Audit Report and Certificate Code: 0076-01-24-ECU-CR.

- Product certifications:

Mechanical properties in accordance with EN 13361 and EN 13362. Root resistance in accordance with EN 14416.

Name and location of production site: **RENOLIT ALKORPLAN Hydro R SST** is produced in **RENOLIT Ibérica** in Sant Celoni (Spain).

2. Product information

Product name and description

Name

RENOLIT ALKORPLAN Hydro R SST

Identification

RENOLIT ALKORPLAN Hydro R SST 00414

Brief description

Geomembrane of flexible polyvinyl chloride (PVC-P), reinforced with PES grid. Designed for lagoons, dams and canals. Expected service lifetime: 30 years.

Product specifications

- High UV stability
- Resistant to swelling, rotting and ageing
- Geomembrane produced with high quality resins, this guarantees high consistency of properties and optimum durability
- Mechanical properties in accordance with EN 13361 and EN 13362
- Very high level of water tightness, even with permanent deformation
- Large capacity for adaptation to irregularities or deformation of support owing to its high deformability and weld strength
- High resistance to puncturing
- Root resistance in accordance with EN 14416
- Not resistant to bitumen, oil and tar
- Generally, when laying gravely sand, gravel, selected fill or concrete on a geomembrane, a geotextile or a protection membrane of non-reinforced PVC-P **RENOLIT ALKORPLAN 35020** should be placed in between as a suitable separation layer

The EPD focuses on the 1,5 mm thickness variant, even though there are more options, as can be seen in the next table.

Characteristics	Unit	Specifications
Thickness (EN-1849-2)	mm	1,20 / 1,50 / 2,00
Density (EN ISO 1183, ASTM D 792)	g/cm ³	1,24
Tensile strength (EN ISO 527)	N/50mm	≥ 1050
Elongation at failure (EN ISO 527)	%	L: ≥ 15 T: ≥ 15
Static puncture resistance (CBR) (EN 12236)	kN	2,70 / 3,10 / 3,50
Tear strength (ISO 34)	kN/m	≥ 150
Nail tear resistance strength (EN 12310-1)	N	≥ 400
Lamination strength (EN 122316-2)	N/50mm	≥ 150
Resistant under water pressure (DIN 16726)		Waterproof at 6 bar/72 h
Dimensional stability after accelerated ageing (6h/80°C) (EN ISO 1107-2)	%	≤ 0,3
Behaviour after long-term ageing 56d/50°C Methods A&B.	(EN 14415)	
-General appearance		No blister
-Dimensional stability, L&T	%	≤ 2
-Variation of tensile strength, L&T	%	< ±10
-Variation of elongation at failure, L&T	%	< ±10
-Folding at -20°C		No cracks
Resistant to artificial weathering (EN 12224)		Fulfilled
Water permeability (EN 14150)	m ³ /m ² /day	10 ⁻⁶
Oxidation resistance 90d/85°C (EN 14575)		Fulfilled
Stress cracking resistance (ASTM D5397-99)		Only for polyolefin
Cold folding resistance (EN 495-5)		No cracks at -20°C
Root resistance (EN 14416)		Fulfilled

This product can be grouped in the UN CPC code 363 – Semi-manufactures of plastics, and more specifically in code 36390: plates, sheets, film, foil and strips of plastics.

Geographical scope Global



Relu on it.



Product composition

The base raw materials for RENOLIT ALKORPLAN Hydro R SST geomembrane for lagoons, dams and canals waterproofing are:

- Polyvinyl chloride (PVC) 45-55%
- Plasticizer 25-35%
- Stabilisers (UV/heat) 1-5%
- Chalk 1-5%
- Reinforcing material, embedded polyester scrim 1-5%
- Colour pigments 5-15%
- Processing aids 1-5%
- PMMA <1%
- Soja oil 1-5%

Manufacturing process

The production process of thermoplastic sheets is carried out with the calendering and extrusion processes, prior to the preparation of mixtures of raw materials according to the type of product to be manufactured. The processes of the establishment are as follows:

- Calendering: process by which the mixture that has been previously prepared and homogenized, in accordance with the formulations provided for each product, undergoes a transformation process through the application of heat, pressure and friction, through a "spindle". Later, the mixture is transformed into a plastic sheet by being rolled by the calender.
- Extrusion: Using this type of technology, the prepared and homogenized mixture, as in the previous case, melts when passing through a "spindle" and being subjected to temperature. The molten mixture is transformed into a plastic sheet when exiting through the nozzle, the length of which corresponds to the width of the sheet.
- The processes for obtaining the thermoplastic sheet described can be followed by one or several finishing processes for the manufactured sheets. The finishing processes can be:
 - o Printing or lacquering of sheets: This process carries out the printing or lacquering of sheets using the "hologravure" technology.
 - o Mechanical engraving: In this phase of the production process of the thermoplastic sheets, a mechanical engraving or embossing of the sheets is carried out, sometimes simultaneously with the lacquering.
 - o Verification and cutting: In this process the products are verified, removing the defective part and giving them the presentation desired by the customer. Transforming the rolls of industrial use into rolls, of length specified by the customer or by the requirements of the product.
- Recovery process of PVC material with polyester mesh: There is a secondary process consisting of the recovery of PVC with polyester mesh by means of grinding in a mill and subsequent separation by gravity of both using two air columns. In a second phase, the segregated PVC is crushed in a second mill and sent to Big-bags, or to two silos for storage or to make mixtures of different types.



Relu on it.

3. LCA information

Declared unit: 1 m² of RENOLIT ALKORPLAN Hydro R SST geomembrane for waterproofing for a reference service life of 120 years

Reference service life: 120 years

Reference service life: 120 years

Service life: 30 years (3 replacements)

Time representativeness: Data as current as possible was used. For generic data, the limit has been established to 10 years and for specific data, a maximum of 5 years was allowed. The time period over which inputs and outputs from the system will be accounted for is 100 years.

Database(s) and LCA software used: Generic data is obtained from GaBi software database. This database is based on the International Reference Life Cycle Data System (ILCD), as required by EN 15804:2012+A2:2019.

- GaBi Professional v. 10.6.2.9
- GaBi database: 2021.2

System diagram: see figure 1

Description of system boundaries: "Cradle-to-gate with options, module B4, modules C1-C4 and module D" according to EN 15804 and the PCR. This includes the following life cycle stages:

- Modules A1-A3: Product stage
 - A1: Raw materials supply
 - A2: Transport
 - A3: Manufacturing
- Modules A4-A5: Construction process stage
 - A4: Transport
 - A5: Construction installation
- Module B Use stage:
 - B4: Replacement
- Module C End of life stage
 - C1: Deconstruction, demolition
 - C2: Transport
 - C3: Waste processing

C4: Disposal

- Module D Benefits and loads beyond the system boundary.
Reuse, recovery, recycling potential

Excluded lifecycle stages: The following processes are excluded from the analysis, according to the PCR selected:

- Inventory flows from infrastructure, construction, production equipment and tools that are not directly used in the production process.
- Inventory flows from personnel-related processes, such as transportation to and from work.
- Waste generated during manufacturing process. Material losses are reintroduced in the manufacturing process.
- Waste generated during manufacturing process. Waste represents less than 5% related to the total production.

More information:

Company website: <https://www.renolit.com/es/>

LCA practitioners: Alba Bala (UNESCO Chair in Life Cycle and Climate Change ESCI-UPF), Lluc Fullana & Raúl Antúnez (Grup Carles)

The **rules for allocation** employed in this study are the ones stated in ISO 14044:2006, 4.3.4., and include the specifications for construction products detailed in EN 15804:2012+A2:2019. Allocation has been avoided as far as possible by dividing the unit process to be allocated into different sub-processes that can be allocated to each one of the co-products and collecting specific data on those sub-processes. In case it has not been possible, the allocation has been done taking into account the physical relationship among the different products. In this case, due to the similarity in the production process of all products produced by **RENOLIT**, a weight allocation has been used.

A mass **cut-off rule** has been applied for the fixing materials used to fix the flexible sheets

during the installation process. No other specific cut-off rules have been applied.

Reference service life


RSL information	Unit (expressed per functional unit or per declared unit)	
Reference Service Life	Years	30
Declared product properties (at the gate) and finishes, etc.	Units as appropriate	Refer to TDS and DoP
Design application parameters (if instructed by the manufacturer), including the references to the appropriate practices and application codes	Units as appropriate	The design of the waterproofing system shall follow EN 13361, EN 13362 and relevant national standards
An assumed quality of work, when installed in accordance with the manufacturer's instructions	Units as appropriate	The membrane shall be installed as per manufacturer instructions
Outdoor environment, (for outdoor applications), e.g. weathering, pollutants, UV and wind exposure, building orientation, shading, temperature	Units as appropriate	The product is designed to remain exposed and shall resist usual atmosphere conditions. The Service Life might be affected by severe meteorological events, the presence of pollutants, water at high temperatures or other abnormal circumstances different than usual conditions.
Indoor environment (for indoor applications), e.g. temperature, moisture, chemical exposure	Units as appropriate	N/A
Usage conditions, e.g. frequency of use, mechanical exposure	Units as appropriate	The membrane will remain exposed to the atmosphere during its service life
Maintenance e.g. required frequency, type and quality and replacement of components	Units as appropriate	No maintenance is expected other than regular visual inspection and punctual repairs where needed

Figure 1. Modules declared

	Product stage			Construction process stage		Use stage							End of life stage			Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	ND	ND	ND	X	ND	ND	ND	x	X	x	X	X
Geography	Global																
Specific data used	More than 99% specific data is used in the EPD.					-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	Not relevant																
Variation – sites	Not relevant																



Figure 2. Flow diagram of the system under study

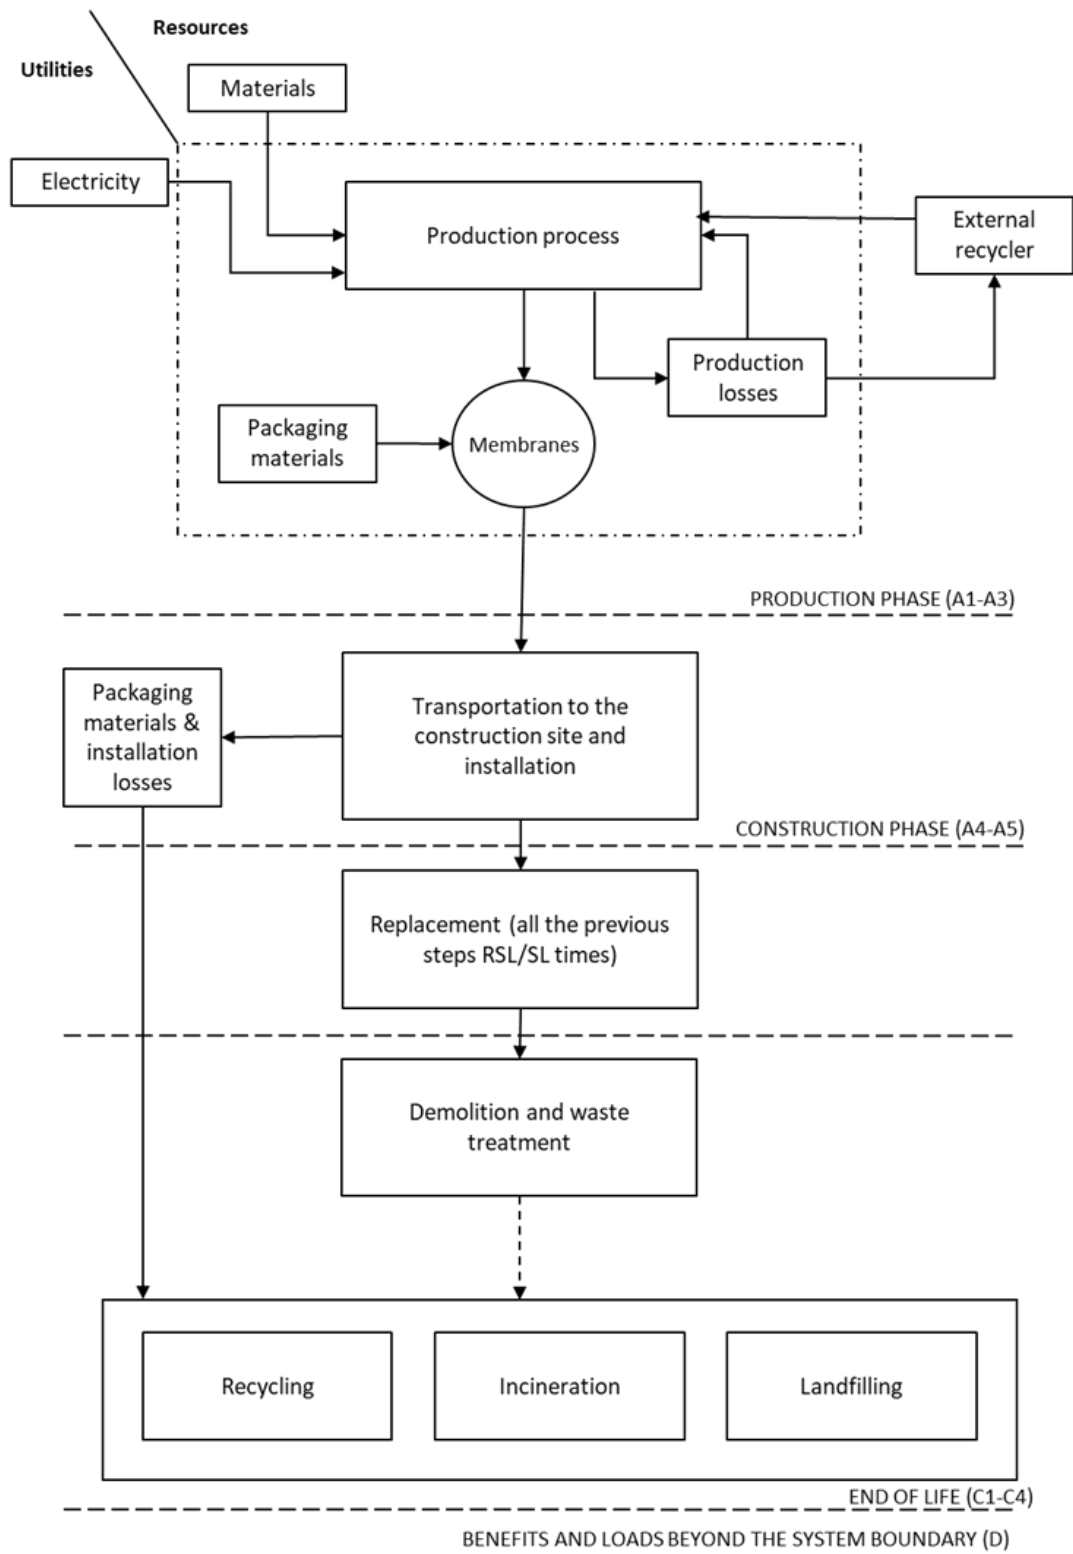

RSL: Reference Service Life
SL: Service Life

A1-A3 PRODUCT STAGE

- **A1 Raw materials supply:** this module takes into account the extraction and processing of raw materials and the energy that is produced prior to the manufacturing process under study.
- **A2 Transport:** this module includes the transport of the different raw materials from the manufacturer to the factory. The distance and type of concrete truck for each raw material has been introduced.
- **A3 Manufacturing:** this module includes the consumption of energy and water used during the manufacturing process, as well as the transport and management of the factory-produced waste.

A4-A5 CONSTRUCTION PROCESS STAGE

- **A4 Transport**

PARAMETER	VALUE/DESCRIPTION
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat, etc.	20-26 tons truck with a maximum load capacity of 17,3 tons. This truck complies with the Euro V regulations. 0,102 KG DIESEL
Distance	Truck: 800 km
Capacity utilisation (including empty returns)	98%
Bulk density of transported products	1,3 kg/m ³

- **A5 construction / installation**

PARAMETER	VALUE/DESCRIPTION						
Ancillary materials for installation (specified by material)	No auxiliary material used						
Water use	Not used						
Other resource use	No other resource consumption						
Quantitative description of energy type (regional mix) and consumption during the installation process	Electricity grid mix, ES 0,212 MJ						
Waste materials on the building site before waste processing, generated by the product's installation (specified by type)	<table border="0"> <tr> <td>Components for re-use [kg]</td> <td>1,36</td> </tr> <tr> <td>Materials for recycling [kg]</td> <td>0,171</td> </tr> <tr> <td>Materials for energy recovery [kg]</td> <td>0,162</td> </tr> </table>	Components for re-use [kg]	1,36	Materials for recycling [kg]	0,171	Materials for energy recovery [kg]	0,162
Components for re-use [kg]	1,36						
Materials for recycling [kg]	0,171						
Materials for energy recovery [kg]	0,162						
Output materials (specified by type) as result of waste processing at the building site e.g. of collection for recycling, for energy recovery, disposal	0,149 kg Disposal						
Direct emissions to environment, air, soil and water	No emissions						

B1-B7 USE STAGE

- B4 replacement**

PARAMETER	VALUE/DESCRIPTION
Replacement cycle	3
Energy input during replacement e.g. crane activity, energy carrier type, e.g. electricity and amount if applicable and relevant	0,635 MJ
Exchange of worn parts during the product's life cycle, e.g. zinc galvanized steel sheet, specify materials	NOT APPLICABLE

C1-C4 END OF LIFE STAGE

- C2-C4. Transport/ disposal**

PARAMETER	VALUE/DESCRIPTION
Collection process specified by type	
	7,44kg collected with mixed construction waste
Disposal specified by type	7,44kg product or material for final deposition

After the service life of the product, the geomembranes are removed and sent to a landfill. Thus, the corresponding transport and waste management have been considered in this stage. A bulky waste truck of 20-26 tons of gross weight and a maximum load capacity of 10 tons has been considered. This truck complies with the Euro VI regulations. An average distance of 100 km has been considered. For the diesel consumed by the truck, the mix of production of diesel at filling station of Sphera database has been used. This considers an average 6,35 % in weight of diesel from renewable sources. For the disposal, the inventory "Plastic waste on landfill" from GaBi database has been used. This is representative for EU-28 and valid for the period 2020-2023.

BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY (D)

For calculating the credits due to the recycling of materials, value-correction factors that reflects the difference in functional equivalence of recycled versus virgin materials have been applied. In particular, the ones provided by the Product Environmental Footprint (PEF): 0,85 for cardboard, 1 for wood chips and 0,75 for PVC, in this case corresponding to the lower value for plastics.

In this stage, the credits due to the incineration of the felt blanket with energy recovery have also been considered. In this case, the average mixes to produce electricity and thermal energy from natural gas in Europe (EU-28) have been used. They are representative for the period 2020-2023

4. Content declaration

Product

Product components	Weight, %	Post-consumer material, weight-%	Renewable material, weight-%
Chalk	1-5%	0%	0%
Processing aids	1-5%	0%	0%
Colour Pigments	5-15%	0%	0%
Plasticizer	25-35%	0%	0%
PPMA	<1%	0%	0%
Polyvinyl chloride (PVC)	45-55%	0%	0%
Reinforcing material, embedded polyester scrim	1-5%	0%	0%
Stabilizers (UV/heat)	1-5%	0%	0%
Soja oil	1-5%	0%	0%
TOTAL	100 %	0%	0%
Packaging materials	Weight (gr)		
Cardboard tubes	9,52		
PVC flexible	0,13		
Cardboard tires	0,10		
Pallet 210x210	79,37		
Wood pieces	0,24		
Felt blanket	9,52		
TOTAL	98,87		

None of the final product components are included in the “Candidate list of substances of very high concern for authorisation” of the REACH regulation.

Packaging

Distribution packaging: This distribution packaging is the same as the consumer packaging. Primarily, the geomembranes are rolled around a cardboard tube of 70x83x2170 mm and protected with PVC film. Each role contains 100 linear meters of geomembrane. Secondly, a wood pallet of 210x210 mm is prepared with a couple of nailed wooden pieces attached. Afterwards, a blanket is placed at the bottom of the pallet. Finally, 3 rolls of geomembranes are arranged in a single pallet and fixed with cardboard tires of 1400x100x1,5 mm.

Recycled material

Provenience of recycled materials (pre-consumer or post-consumer) in the product:

The products under study are not composed by any recycled material.

Electric mix. kg CO₂ eq./kWh

- MIX RENOLIT (production): 0,000247 kg CO₂ eq./kWh.
- Spanish Mix (installation): 0,412 Kg CO₂ eq/kWh.
- Mix EU-28 (packaging recycling process-installation): 0,401 kg CO₂ eq./kWh.

5. Environmental performance

Potential environmental impact

Indicator	Unit	Manufacture			Installation		Use	End of life				Module
		A1	A2	A3	A4	A5	B4	C1	C2	C3	C4	D
EN 15804 +A1												
Global warming potential (GWP) - A1	[kg CO2 eq.]	4,56E+00	1,00E-01	2,56E-04	9,02E-02	1,64E-01	1,47E+01	0,00E+00	1,64E-01	0,00E+00	4,98E-01	1,47E+00
EN 15804 +A2												
Global warming potential (GWP) -Total	[kg CO2 eq.]	4,73E+00	1,03E-01	2,64E-04	9,24E-02	1,65E-01	1,53E+01	0,00E+00	1,68E-01	0,00E+00	5,28E-01	1,45E+00
Global warming potential (GWP) - fossil	[kg CO2 eq.]	5,29E+00	1,02E-01	2,63E-04	9,18E-02	1,65E-01	1,69E+01	0,00E+00	1,67E-01	0,00E+00	5,33E-01	-7,07E-01
Global warming potential (GWP) - biogenic	[kg CO2 eq.]	-5,60E-01	-1,22E-04	5,16E-08	-1,10E-04	-2,31E-05	-1,68E+00	0,00E+00	-2,00E-04	0,00E+00	-5,56E-03	2,16E+00
Global warming potential (GWP) -luluc	[kg CO2 eq.]	4,61E-03	8,36E-04	6,62E-07	7,52E-04	1,01E-04	1,89E-02	0,00E+00	1,37E-03	0,00E+00	4,46E-04	-1,89E-03
Ozone depletion	[kg CFC-11 eq.]	1,39E-10	2,02E-17	2,85E-16	1,82E-17	4,12E-16	4,16E-10	0,00E+00	3,31E-17	0,00E+00	1,29E-15	-1,93E-12
Acidification	[Mole of H+ eq.]	1,15E-02	3,61E-04	1,33E-06	9,20E-05	9,91E-05	3,62E-02	0,00E+00	2,33E-04	0,00E+00	1,60E-03	-1,91E-03
Eutrophication - freshwater	[kg P eq.]	1,22E-05	3,04E-07	4,55E-09	2,73E-07	5,53E-07	4,01E-05	0,00E+00	4,98E-07	0,00E+00	9,84E-05	-3,84E-06
Eutrophication - marine	[kg N eq.]	2,83E-03	1,67E-04	4,45E-07	2,82E-05	2,48E-05	9,16E-03	0,00E+00	8,56E-05	0,00E+00	3,62E-04	-7,41E-04
Eutrophication - terrestrial	[Mole of N eq.]	3,06E-02	1,86E-03	4,42E-06	3,37E-04	3,02E-04	9,93E-02	0,00E+00	9,91E-04	0,00E+00	3,97E-03	-7,98E-03
Photochemical ozone formation, human health	[kg NMVOC eq.]	1,54E-02	3,26E-04	1,20E-06	7,90E-05	6,96E-05	4,76E-02	0,00E+00	2,10E-04	0,00E+00	1,16E-03	-2,18E-03
Resource use, mineral and metals - minerals&metals	[kg Sb eq.]	6,74E-06	9,07E-09	3,40E-09	8,16E-09	7,11E-09	2,03E-05	0,00E+00	1,49E-08	0,00E+00	3,67E-08	-1,47E-07
Resource use - fossil	[MJ]	1,34E+02	1,36E+00	2,00E-03	1,23E+00	6,28E-01	4,12E+02	0,00E+00	2,23E+00	0,00E+00	7,77E+00	-1,17E+01
Water use	[m³ world equiv.]	4,77E-01	9,50E-04	8,94E-03	8,54E-04	2,97E-02	1,55E+00	0,00E+00	1,56E-03	0,00E+00	-6,56E-03	-7,28E-02



Relly on it.



Use of resources

Resource use indicators	Unit	Manufacture			Installation		Use	End of life				Module
		A1	A2	A3	A4	A5	B4	C1	C2	C3	C4	D
Use of renewable primary energy (PERE)	[MJ]	1,79E+01	7,84E-02	1,22E-01	7,05E-02	2,46E-01	5,51E+01	0,00E+00	1,29E-01	0,00E+00	5,64E-01	-2,61E+01
Use of renewable primary energy resources used as raw materials (PERM)	[MJ]	4,58E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,37E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renewable primary energy resources (PERT)	[MJ]	1,79E+01	7,84E-02	1,22E-01	7,05E-02	2,46E-01	5,51E+01	0,00E+00	1,29E-01	0,00E+00	5,64E-01	-2,61E+01
Use of non-renewable primary energy (PENRE)	[MJ]	1,34E+02	1,37E+00	2,00E-03	1,23E+00	6,29E-01	4,12E+02	0,00E+00	2,24E+00	0,00E+00	7,77E+00	-1,17E+01
Use of non-renewable primary energy resources used as raw materials PENREM	[MJ]	5,35E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,61E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-renewable primary energy resources (PENRT)	[MJ]	1,34E+02	1,37E+00	2,00E-03	1,23E+00	6,29E-01	4,12E+02	0,00E+00	2,24E+00	0,00E+00	7,77E+00	-1,17E+01
Use of secondary material SM	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water (FW)	[m3]	2,43E-02	8,98E-05	1,16E-04	8,08E-05	5,35E-04	7,54E-02	0,00E+00	1,47E-04	0,00E+00	7,17E-05	-3,79E-03
Use of renewable secondary fuels RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00



Waste production and output flows

Waste production

Output flows and waste categories	Unit	Manufacture			Installation		Use	End of life				Module
		A1	A2	A3	A4	A5	B4	C1	C2	C3	C4	D
Hazardous waste disposed (HWD)	[kg]	1,12E-06	7,21E-11	2,48E-11	6,48E-11	1,01E-10	3,35E-06	0,00E+00	1,18E-10	0,00E+00	1,40E-09	-4,94E-08
Non-hazardous waste disposed (NHWD)	[kg]	4,67E-01	2,15E-04	5,50E-05	1,93E-04	3,78E-02	1,52E+00	0,00E+00	3,52E-04	0,00E+00	7,41E+00	-8,34E-03
Radioactive waste disposed (RWD)	[kg]	2,04E-03	2,48E-06	8,08E-08	2,23E-06	6,07E-05	6,31E-03	0,00E+00	4,07E-06	0,00E+00	9,03E-05	-7,22E-04

Output flows

Parameter	A1	A2	A3	A4	A5	B4	C1	C2	C3	C4	D
Components for re-use [kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,36E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling [kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,71E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery [kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,62E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy [MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,02E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Other environmental indicators

Optional indicators	Unit	A1	A2	A3	A4	A5	B4	C2	C4	D
Particulate matter	[Disease incidences]	1,91E-07	2,07E-09	1,08E-11	6,55E-10	7,74E-10	5,84E-07	1,36E-09	1,57E-08	-2,93E-07
Ionising radiation, human health	[kBq U235 eq.]	2,68E-01	3,63E-04	1,01E-05	3,26E-04	5,78E-03	8,25E-01	5,95E-04	1,29E-02	-1,09E-01
Ecotoxicity, freshwater	[CTUe]	5,46E+01	1,01E+00	1,59E-03	9,09E-01	2,85E-01	1,70E+02	1,66E+00	7,38E+00	-4,04E+00
Human toxicity, cancer	[CTUh]	8,86E-09	2,05E-11	1,82E-12	1,84E-11	1,00E-11	2,67E-08	3,35E-11	3,31E-10	-1,47E-09
Human toxicity, non-cancer	[CTUh]	8,84E-07	1,22E-09	2,01E-11	9,51E-10	4,10E-10	2,66E-06	1,74E-09	2,77E-08	-7,16E-09
Land Use	[Pt]	1,14E+02	4,68E-01	2,41E-02	4,21E-01	1,51E-01	3,46E+02	7,68E-01	5,29E-01	-3,90E+02

Biogenic carbon content	Unit	A1	A2	A3	A4	A5	B4	C2	C4	D
Biogenic carbon content in product	[Kg C]		4,10E-03		0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content in accompanying packaging	[Kg C]		6,66E-01		0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00



Reli on it.



In order to further analyse the results, the characterized results have been normalized by the average emissions of a European citizen. For doing this, the normalization factors of the Product Environmental Footprint (PEF) of the European Union, adapted to the indicators of EN 15804 have been used. The 3 most relevant impact categories are Human Toxicity, non-cancer effects (HTP-nc), Resource Use Fossil (ADP-fossil), and Ecotoxicity Freshwater (ETP-fw) , as can be seen in the following figure.



Figure 3. Normalized results of the environmental impact categories

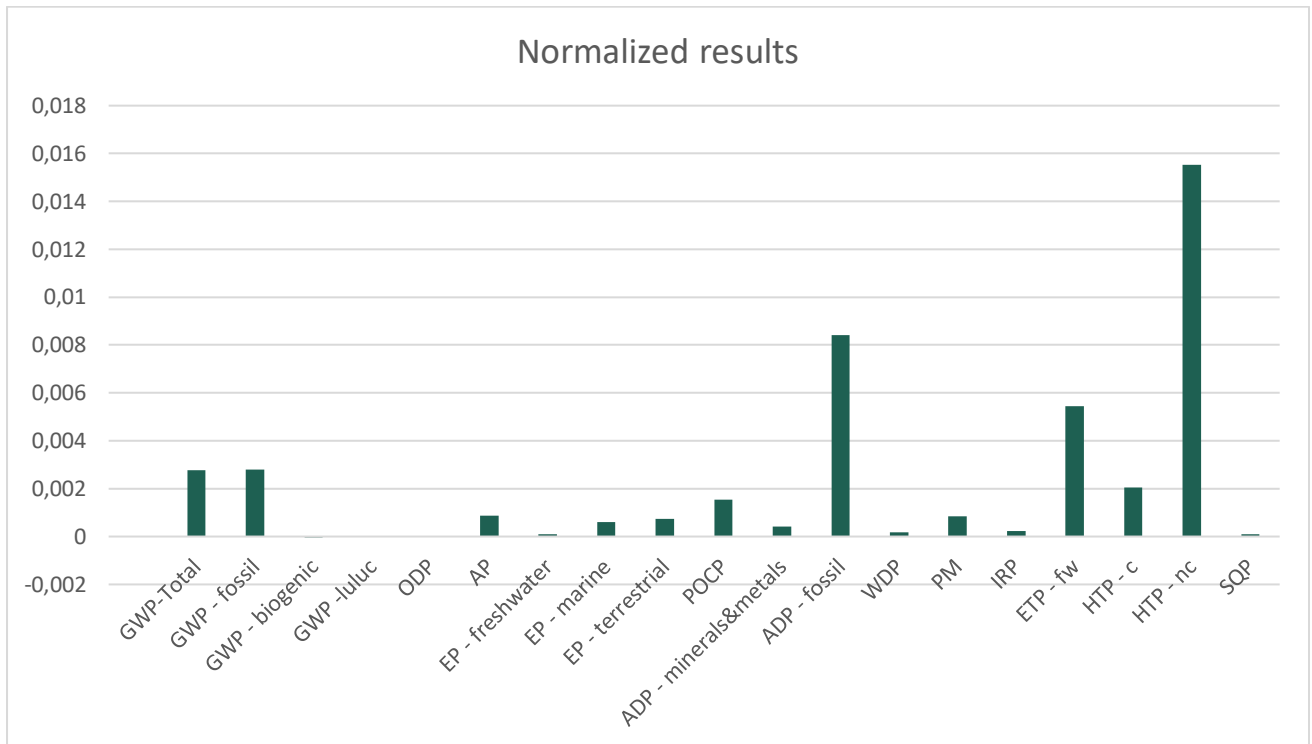


Table 5 – Classification of disclaimers to the declaration of core and additional environmental impact indicators

ILCD classification	Indicator	Disclaimer
ILCD Type 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
ILCD Type 2	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD Type 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2
Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible		

ILCD classification	Indicator	Disclaimer
	nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.	
	Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.	

A-1

References

General Programme Instructions of the International EPD® System. Version 3.01.

PCR 2019:14. Construction products (EN 15804:A2). (1.11)

CNMC, 2020. Comisión Nacional de los Mercados y la Competencia, 2020. Acuerdo sobre información estadística del sistema de garantías de origen relativo a la energía producida en el año 2020. Expediente nº: GDO/DE/001/21

https://gdo.cnmc.es/CNE/resumenGdo.do?informe=garantias_etiquetado_electricidad

ISO 14025:2006, Environmental labels and declarations – Type III environmental declarations – Principles and procedures.

ISO 21930:2017, Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services.

UNE-EN ISO 14040:2006. UNE-EN ISO 14040:2006. Gestión medioambiental. Análisis del ciclo de vida. Principios y marco de referencia. AENOR, Madrid.

UNE EN ISO 14044:2006. UNE EN ISO 14043:2001. Gestión medioambiental. Análisis del ciclo de vida. Requisitos y directrices. AENOR, Madrid.

UNE-EN 15804:2012+A2:2019. Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products.

Weidema, B.P. and Wesnaes, M., 1996. Data quality management for life cycle inventories – an example using data quality indicators. Journal of Cleaner Production 4 (3-4): 167-174.

VERIFICATION STATEMENT CERTIFICATE CERTIFICADO DE DECLARACIÓN DE VERIFICACIÓN

Certificate No. / Certificado nº: EPD07901

TECNALIA R&I CERTIFICACION S.L., confirms that independent third-party verification has been conducted of the Environmental Product Declaration (EPD) on behalf of:

TECNALIA R&I CERTIFICACION S.L., confirma que se ha realizado verificación de tercera parte independiente de la Declaración Ambiental de Producto (DAP) en nombre de:

RENOLIT Ibérica S.A.
Ctra. Del Montnegre S/N
08470 SANT CELONI (Barcelona) - SPAIN

for the following product(s):
para el siguiente(s) producto(s):

Reinforced geomembrane for hydraulics works - RENOLIT ALKORPLAN Hydro R SST
Geomembrana reforzada para obras hidráulicas - RENOLIT ALKORPLAN Hydro R SST

with registration number **S-P-07050** in the International EPD[®] System (www.environdec.com).
*con número de registro **S-P-07050** en el Sistema Internacional EPD[®] (www.environdec.com).*

it's in conformity with:
es conforme con:

- **ISO 14025:2010 Environmental labels and declarations. Type III environmental declarations.**
- **General Programme Instructions for the International EPD[®] System v.3.01.**
- **PCR 2019:14 Construction products (EN 15804:A2) v1.11.**
- **UN CPC 36390 Plates, sheets, film, foil and strip of plastics.**



Carlos Nazabal Alsua
Manager

Issued date / Fecha de emisión:	14/03/2023
Update date / Fecha de actualización:	14/03/2023
Valid until / Válido hasta:	13/03/2028
Serial N ^o / N ^o Serie:	EPD0790100-E

*This certificate is not valid without its related EPD.
Este certificado no es válido sin su correspondiente EPD.*

*El presente certificado está sujeto a modificaciones, suspensiones temporales y retiradas por TECNALIA R&I CERTIFICACION.
This certificate is subject to modifications, temporary suspensions and withdrawals by TECNALIA R&I CERTIFICACION.*

*El estado de vigencia del certificado puede confirmarse mediante consulta en www.tecnaliacertificacion.com.
The validity of this certificate can be checked through consultation in www.tecnaliacertificacion.com.*



